



US008529249B2

(12) **United States Patent**  
**Haskin et al.**

(10) **Patent No.:** **US 8,529,249 B2**  
(45) **Date of Patent:** **Sep. 10, 2013**

(54) **FLAME HOLDER SYSTEM**

(75) Inventors: **Henry H. Haskin**, Newport News, VA  
(US); **Peter Vasquez**, Gloucester, VA  
(US)

(73) Assignee: **The United States of America as  
represented by the Administrator of  
the National Aeronautics and Space  
Administration**, Washington, DC (US)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 901 days.

(21) Appl. No.: **11/860,703**

(22) Filed: **Sep. 25, 2007**

(65) **Prior Publication Data**

US 2009/0081601 A1 Mar. 26, 2009

(51) **Int. Cl.**  
**F23D 14/46** (2006.01)

(52) **U.S. Cl.**  
USPC ..... **431/353**; 431/350; 431/354; 285/396;  
285/402; 239/600; 403/319

(58) **Field of Classification Search**  
USPC ..... 431/159, 181, 345, 350, 353, 354,  
431/355; 285/361, 376, 396, 402; 239/589,  
239/600, 148.21; 403/319; 220/301  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

28,694 A \* 6/1860 Smith ..... 239/589  
263,415 A \* 8/1882 Lightburne, Jr. .... 285/8  
794,539 A \* 7/1905 O'Brien ..... 285/89  
906,217 A \* 12/1908 Gaylord ..... 285/391

919,743 A \* 4/1909 Mason ..... 285/361  
931,327 A \* 8/1909 Manzel ..... 279/93  
1,130,726 A \* 3/1915 Greve ..... 285/376  
1,132,969 A \* 3/1915 Paul .....  
1,307,273 A \* 6/1919 Salley ..... 285/361  
1,390,264 A \* 9/1921 Allen et al. .... 239/117  
1,622,216 A \* 3/1927 Anlauf et al. .... 285/88  
1,646,456 A \* 10/1927 Noreen et al. .... 239/416.4  
1,670,147 A \* 5/1928 Gault, Jr. .... 431/353  
1,738,893 A \* 12/1929 Grady ..... 220/301  
1,845,882 A \* 2/1932 Litschge ..... 285/361  
2,148,535 A \* 2/1939 Cone ..... 239/390  
2,368,370 A \* 1/1945 Maxon, Jr. .... 431/249  
2,437,180 A \* 3/1948 Allen ..... 439/277  
2,496,264 A \* 2/1950 Benson .....  
2,562,505 A \* 7/1951 Mueller ..... 239/283  
2,598,009 A \* 5/1952 Peeps ..... 251/149.5

(Continued)

**FOREIGN PATENT DOCUMENTS**

GB 2125501 A \* 3/1984  
GB 2155985 A \* 10/1985  
JP 59231313 A \* 12/1984  
WO WO 02098195 A1 \* 12/2002

*Primary Examiner* — Kang Hu


*Assistant Examiner* — John C Hailey, III

(74) *Attorney, Agent, or Firm* — Robin W. Edwards; Helen  
M. Galus

(57) **ABSTRACT**

A flame holder system includes a modified torch body and a ceramic flame holder. Catch pin(s) are coupled to and extend radially out from the torch body. The ceramic flame holder has groove(s) formed in its inner wall that correspond in number and positioning to the catch pin(s). Each groove starts at one end of the flame holder and can be shaped to define at least two 90° turns. Each groove is sized to receive one catch pin therein when the flame holder is fitted over the end of the torch body. The flame holder is then manipulated until the catch pin(s) butt up against the end of the groove(s).

**7 Claims, 2 Drawing Sheets**

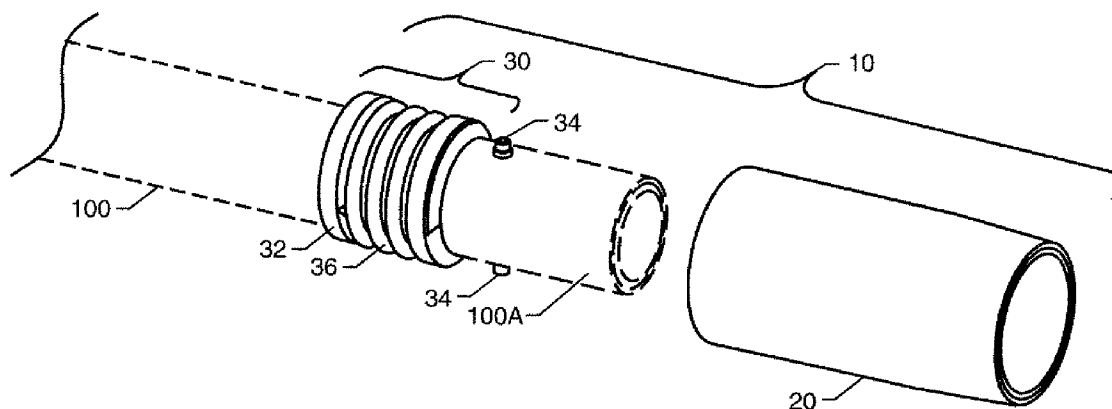



(56)

References Cited

U.S. PATENT DOCUMENTS

2,647,568	A *	8/1953	Sloan	431/183	4,936,511	A *	6/1990	Johnson et al.	239/346
3,215,098	A *	11/1965	Nelson	431/356	660,550	A *	10/1990	Beese	431/109
3,227,202	A *	1/1966	Morgan	431/353	5,087,086	A *	2/1992	Snedeker	285/361
3,364,704	A *	1/1968	Bernstein	431/28	D326,507	S *	5/1992	Rowley	D23/260
3,512,912	A *	5/1970	Linch	431/344	5,137,189	A *	8/1992	Hall et al.	222/603
3,612,037	A *	10/1971	Spiggle		5,199,649	A *	4/1993	Tolboll	239/600
3,627,460	A *	12/1971	Gilman	431/111	5,249,958	A *	10/1993	Freber	431/354
3,663,154	A *	5/1972	Locke	431/353	5,487,507	A *	1/1996	McDonald et al.	239/391
3,861,858	A *	1/1975	Hemsath et al.	431/353	5,741,084	A *	4/1998	Del Rio et al.	403/349
3,905,755	A *	9/1975	Aske	431/344	6,209,807	B1 *	4/2001	Hsin-Fa	239/600
4,025,292	A *	5/1977	Bailey et al.	431/353	6,730,218	B2 *	5/2004	Bozenmayer	210/232
4,071,195	A *	1/1978	Kuhns et al.	239/289	7,029,272	B2 *	4/2006	Jordan et al.	431/278
4,469,932	A *	9/1984	Spiegelberg et al.	219/121.37	7,175,423	B1 *	2/2007	Pisano et al.	431/10
4,527,745	A *	7/1985	Butterfield et al.	239/600	8,114,202	B2 *	2/2012	Burke et al.	96/203
4,746,149	A *	5/1988	Thompson	285/148.13	8,359,746	B2 *	1/2013	Burke et al.	29/890.051
4,780,370	A *	10/1988	Pointier	428/404	2003/0034651	A1 *	2/2003	Neubauer et al.	285/396
					2005/0003317	A1 *	1/2005	Mizuno et al.	431/345
					2007/0236018	A1 *	10/2007	Husmann et al.	285/401

\* cited by examiner

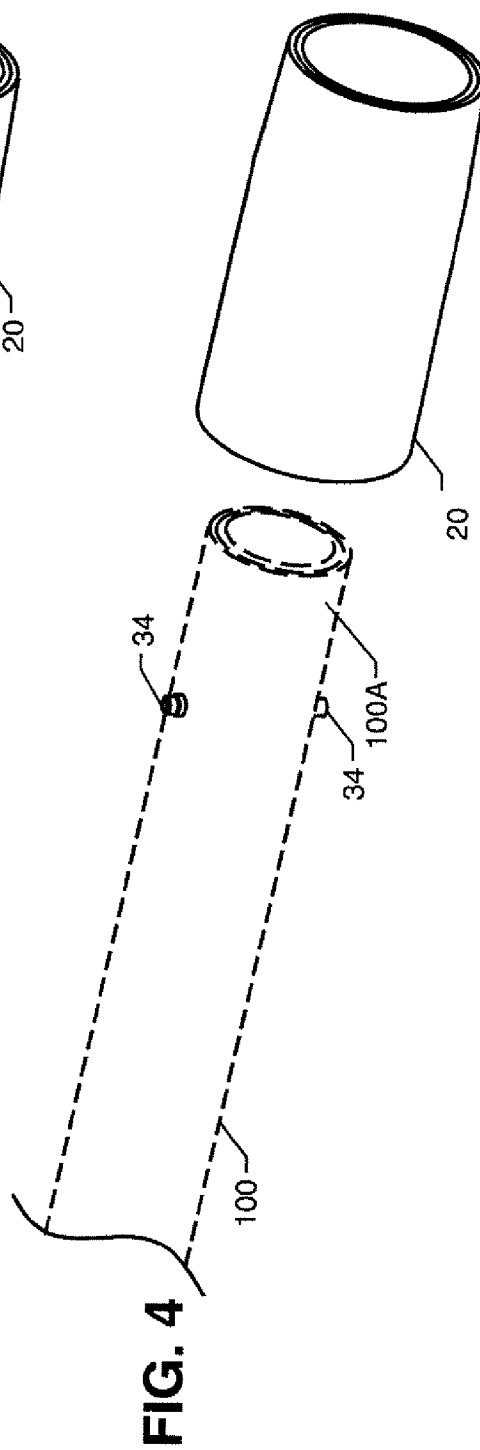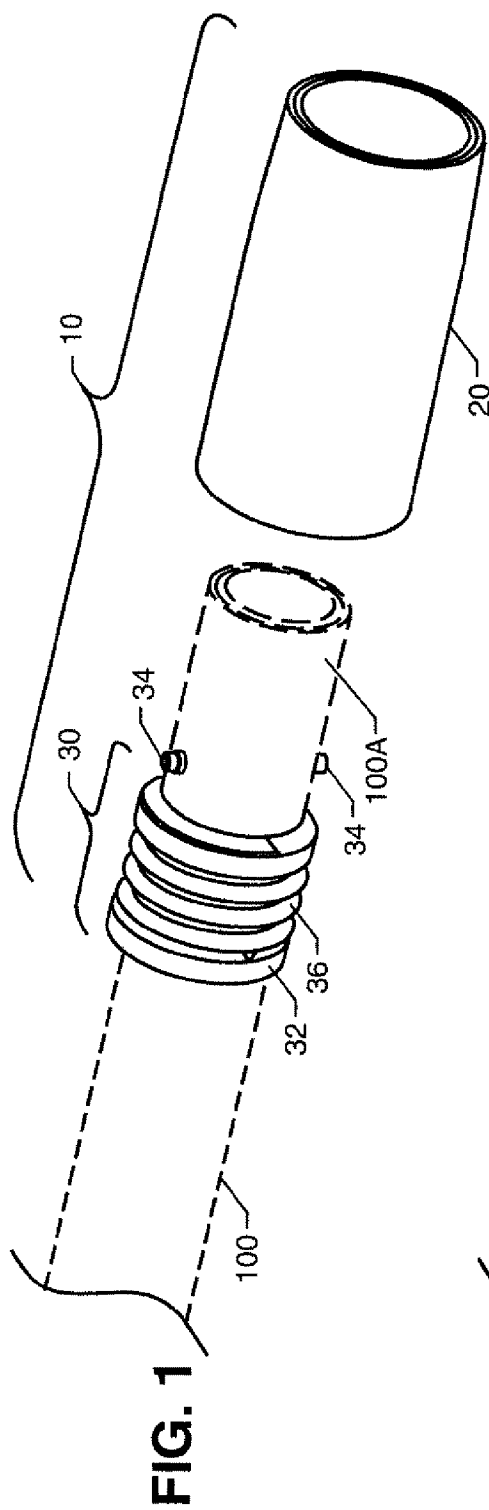

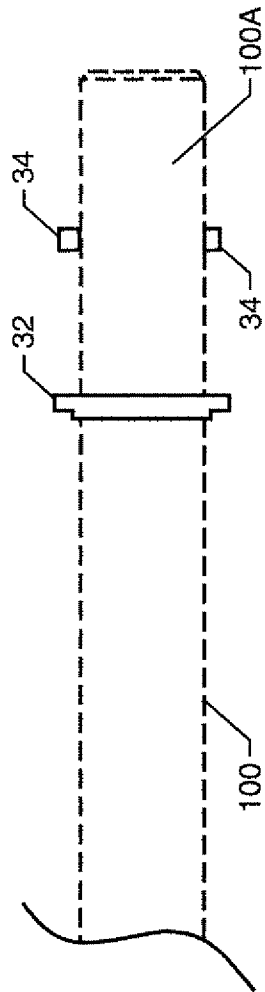


FIG. 2

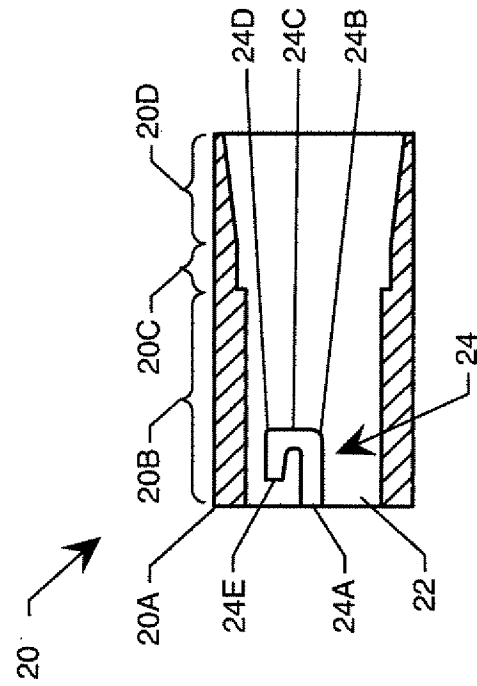


FIG. 3

1

**FLAME HOLDER SYSTEM****ORIGIN OF THE INVENTION**

The invention was made in part by employees of the United States Government and may be manufactured and used by or for the Government of the United States of America for governmental purposes without the payment of any royalties thereon or therefor.

**BACKGROUND OF THE INVENTION****1. Field of the Invention**

This invention relates to high temperature torches. More specifically, the invention is a flame holder systems for use with high temperature torches.

**2. Description of the Related Art**

Propane torches, or burners, typically have a hollow torch body that is finished with a hollow nozzle or "flame holder" as it is known. Existing flame holders are generally made from stainless steel, cast iron or, in some cases, a ceramic material such as alumina oxide. Stainless steel flame holders are attached using set screws that pass radially through the flame holder to engage the outer wall of the torch body. Ceramic flame holders are bonded (e.g., using a ceramic adhesive) to the torch body.

Existing flame holders present problems in applications requiring high temperature operation and/or extended operation times. Flame holders made from metal oxidize quickly on the outer walls thereof and subsequently experience spalling or flaking. If the operating temperatures are high enough, metallic flame holders will melt thereby requiring replacement of the flame holder. However, when the flame holder melts, it is difficult or impossible to disengage the set screws, in which case the whole torch is often discarded. Existing ceramic flame holders tend to work well at continuous high temperature burns, but tend to crack and/or fall apart if used in applications requiring multiple burn cycles such that the flame holder cools between burns. When this happens, the ceramic flame holder must be removed. Since the ceramic flame holder is bonded to the torch body, any ceramic still bonded to the torch body must be chipped or abraded off before a new flame holder can be installed. This can cause hours to days of unscheduled maintenance. Accordingly, it is not uncommon for a perfectly good torch to be discarded simply because of a damaged ceramic flame holder.

**SUMMARY OF THE INVENTION**

Accordingly, it is an object of the present invention to provide a flame holder system suitable for use in continuous-burn and cycled-burn applications.

Another object of the present invention is to provide a flame holder system that facilitates easy attachment and replacement of a flame holder to a torch body.

Other objects and advantages of the present invention will become more obvious hereinafter in the specification and drawings.

In accordance with at least one embodiment of the present invention, a flame holder system includes a modified torch body and a ceramic flame holder (e.g., made from a zirconium oxide castable compound). At least one catch pin is coupled to the torch body near an outboard end thereof. Each such catch pin extends radially outward from the torch body. The ceramic flame holder is bored therethrough from a first end to a second end thereof to define an inner wall with the first end adapted to fit over the outboard end of the torch body but not

2

the catch pins. The flame holder has one or more grooves formed in its inner wall where the grooves correspond in number and positioning to the catch pin(s). Each groove starts at the first end of the flame holder and is shaped to define at least two 90° turns. Each groove is sized to receive a catch pin therein when the flame holder is fitted over the outboard end of the torch body. The flame holder is then manipulated until the catch pin(s) butt up against the end of the groove(s).

**BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 is a perspective view of a flame holder system in accordance with an embodiment of the present invention;

FIG. 2 is a side view of modifications to a torch body in accordance with the present invention;

FIG. 3 is a cross-sectional view of a flame holder in accordance with an embodiment of the present invention; and

FIG. 4 is a perspective view of a flame holder system in accordance with another embodiment of the present invention.

**DETAILED DESCRIPTION OF THE INVENTION**

Referring now to the drawings and more particularly to FIG. 1, a flame holder system in accordance with an embodiment of the present invention is shown and is referenced generally by numeral 10. As will be explained further below, flame holder system 10 cooperates with an outboard end of 100A of a torch body 100 which is illustrated in dashed line form to indicate that torch body 100 is not part of the present invention or a limitation thereon, but rather the invention includes modifications made thereto. That is to say, as is well known in the art, torch body 100 transports gases to be burned during torch operation. As will be readily apparent, the present invention can be adapted to work with any size and/or configuration of torch body 100.

In the illustrated embodiment, flame holder system 10 includes a hollow flame holder 20 and retaining system elements 30 coupled to torch body 100. For clarity of illustration, flame holder 20 is not mounted on torch body 100. However, in use, flame holder 20 will be mounted and retained on torch body 100 as retaining system elements 30 cooperate with features on flame holder 20.

Flame holder 20 can be a hollow cylinder of ceramic material that fits on outboard end 100A and cooperates with retaining system elements 30 to provide for (i) quick connect/disconnect of flame holder 20 to torch body 100, and (ii) retention of flame holder 20 on torch body 100. For high temperature operation, it is advantageous that the ceramic material be a zirconium oxide cashable compound which has a service temperature of approximately 4000° F., is high in strength, and is resistant to thermal shock. The flame holder of the present invention is typically casted (as opposed to being mailed) due to its relatively small size. A suitable zirconium oxide castable compound is RESCORE 760, available commercially from Cotronics Corporation, Brooklyn, N.Y. However, it should be understood that the instant invention could be used with flame holders made from other suitable materials as well. Thus, for example, flame holders made from stainless steel or cast iron are within the scope of the present invention.

Before describing the features of flame holder 20 that allow it to mount and be retained on torch body 100, it is appropriate to describe retaining system elements 30, which will be done while referring to FIGS. 1 and 2. In the illustrated embodiment, retaining system elements 30 comprise two modifications to torch body 100 and one part. More specifically, the

3

two modifications are a stop **32** fixedly coupled to torch body **100** and two pins **34** fixedly coupled to torch body **100** and extending radially outward therefrom. Stop **32** can be a continuous annular flange (as shown) or can be realized by a plurality of discontinuous stops distributed circumferentially about torch body **100** without departing from the scope of the present invention. Radially-extending pins **34** are used to mount and retain flame holder **20** on outboard end **100A**.

While the illustrated embodiment uses two pins **34** that are positioned on torch body **100** in diametric opposition to one another, more or less than two pins **34** could be used without departing from the scope of the present invention. For example, a single pin **34** could be used for horizontal or stationary torch applications. If two or more pins **34** are used, they can be (but not need be) symmetrically disposed about torch body **100**. Indeed, non-symmetric placement of pins **34** could be used to insure proper positioning/attachment of a flame folder. Methods for attaching stop **32** and pins **34** to torch body **100** (or incorporating them into torch body **100**) would be well understood in the art. As illustrated in FIG. 1, retaining system elements **30** also include a spring **36** disposed about torch body **100** between stop **32** and pins **34**. Spring **36** provides a positive retaining force on flame holder **20** as will be described further below.

Referring additionally now to the cross-sectional view of flame holder **20** in FIG. 3, the features of flame holder **20** are shown that allow it to be quickly connected/disconnected to torch body **100** and retained on torch body **100**. These features are provided at one end **20A** of flame holder **20** that will be fitted over outboard end **100A**. More specifically, the inside wall **22** of frame holder **20** has two grooves formed therein where the grooves correspond in number and position to pins **34**. Thus, in the illustrated embodiment, the two grooves are in diametric opposition to one another on inside wall **22**. Accordingly, in FIG. 3, only one of these grooves (i.e., groove **24**) is visible. Since each groove **24** is the same, a description of one will be sufficient to provide an understanding of the present invention.

Groove **24** is open at its end **24A** that is aligned with end **20A**. Groove **24** is sized to receive one of pins **34** therein when end **24A** is aligned with one of pins **34**. Groove **24** extends from end **24A** axially along flame holder **20** to a first 90° turn **24B**, and then extends along a path **24C** formed in inside wall **22** to a second 90° turn **24D** before terminating at an end **24E** that does not extend as far as starting end **24A**. Thus, each groove **24** can define a substantially U-shaped path. However, it is to be understood that each groove could be realized by a more tortuous path having additional turns and that the individual segments of groove **24**, including the segment from the final turn to the end **24E**, can be of varying lengths, without departing from the scope of the present invention.

Additionally, in at least one embodiment, in order to provide that the burner is only properly assembled in a certain manner or direction (e.g., to require "clocking" during assembly), two or more grooves (and corresponding pins) can be of different depths (and pin lengths). This embodiment would be advantageous, for example, to ensure that specifically designed azimuthal or radial features in a particular flame holder are always preserved when the burner is assembled. Additionally, the turns do not necessarily need to be 90° nor at the same angles. However, as would be easily understood, if more than one groove **24** exists than the grooves would need to substantially match one another for ease in assembly, and it would remain advantageous that the final segment of groove **24**, from the final turn to the end **24E** be substantially parallel to the center line of the burner in order to assure proper retention of the pin **34** against end **24E**.

4

In the illustrated embodiment, grooves **24** are configured so that once flame holder **20** is positioned on outboard end **100A** with end **20A** compressing spring **36** until pins **34** rest in first turn **24B**, flame holder **20** can be rotated with each pin **34** riding along a corresponding path portion (or segment) **24C** until second turn **24D** is encountered. At this point, the force of spring **36** is allowed to apply an axial force to flame holder **20** thereby causing each pin **34** to come to rest against a corresponding end **24E**. When spring **36** is used, symmetric placement of pins **34** is preferred for load distribution. The internal diameter of flame holder **20** can vary (e.g., be tapered, stepped, stepped and tapered, etc.) in a variety of ways without departing from the scope of the present invention. For example, as shown in the FIG. 3 embodiment, the internal diameter is constant along region **20B**, stepped at region **20C**, and divergent along region **20D**.

Although the present invention has been described using spring **36**, it is to be understood that some applications (e.g., horizontal or stationary torches) of the present invention may not require a spring. Accordingly, FIG. 4 illustrates an embodiment of the present invention that does not use a spring. That is, torch body **100** is modified only to include pins **34** while a flame holder **20** still has substantially U-shaped grooves **24** formed on inside wall **22** where grooves **24** are in correspondence with the position and number of pins **34** as described in the previous embodiment, i.e., FIG. 3.

The advantages of the present invention are numerous. The flame holder system provides for quick connect/disconnect of a flame holder and provides a long-lasting flame holder. Accordingly, the present invention satisfies two needs for the high-temperature torch applications.

Although the invention has been described relative to a specific embodiment thereof, there are numerous variations and modifications that will be readily apparent to those skilled in the art in light of the above teachings. It is therefore to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described.

What is claimed as new and desired to be secured by Letters Patent of the United States is:

1. A flame holder system, comprising:

a plurality of different-length catch pins adapted to be coupled to an outboard end of a torch body transporting combustible gases to the outboard end during a torch operation, each of said catch pins extending radially outward from the torch body;

a flame holder having an interior cavity extending there-through from a first end to a second end thereof to define an inner wall with said first end adapted to fit over the outboard end of the torch body, said flame holder having a plurality of different-depth grooves formed in said inner wall, each of said grooves corresponding in depth and position to one of said catch pins, each of said grooves-starting at said first end and shaped to define at least two turns, wherein each said at least two turns is 90° such that each said groove is substantially U-shaped with a first segment having an open end and a final segment extending shorter than the first segment, and the first and final segments of each said groove being substantially parallel to a center line of said flame holder, each of said grooves sized to receive only a particular one of said catch pins therein when said flame holder is fitted over the outboard end of the torch body; and

a spring-loaded stop including a spring disposed between said spring-loaded stop and said catch pins and adapted to be coupled to the torch body for engaging said first end of said flame holder fitted over the outboard end of

5

the torch body, and wherein the final segment of each of said grooves of said flame holder engages only a particular one of said catch pins when said spring applies a force axially to said flame holder to thereby retain said flame holder on the torch body.

2. A flame holder system as in claim 1 wherein said catch pins comprise two catch pins that are substantially diametrically opposed to one another on the torch body.

3. A flame holder system as in claim 1 wherein said flame holder is made from one of a ceramic or metallic material.

4. A flame holder system as: in claim 1 wherein an inner diameter of said flame holder varies between said first end and said second end.

5. A flame holder system as in claim 1 wherein said flame holder is made from a zirconium oxide castable compound.

6. A flame holder system, comprising:

at least two different-length catch pins adapted to be coupled to an outboard end of a torch body transporting combustible gases to the outboard end during a torch operation, said catch pins extending radially outward from the torch body;

a zirconium oxide castable compound flame holder bored therethrough from a first end to a second end thereof to define an inner wall with said first end adapted to fit over the outboard end of the torch body, said flame holder having at least two grooves formed in said inner wall,

6

wherein said grooves correspond in number, depth and positioning to said catch pins with each of said grooves starting at said first end and traversing a path that includes two 90° turns wherein each of said grooves is substantially U-shaped with a first segment having an open end and a final segment extending shorter than the first segment. and the first and final segments of each of said grooves being substantially parallel to a center line of said flame holder, each of said grooves sized to receive a particular one of said catch pins therein when said flame holder is fitted over the outboard end of the torch body with said grooves being aligned with said catch pins; and

a spring-loaded stop including a spring disposed between said spring-loaded stop and said catch pins and adapted to be coupled to the torch body for engaging said first end of said flame holder fitted over the outboard end of the torch body, and wherein the final segment of each of said grooves of said flame holder engages only a particular one of said catch pins, said spring applying a force axially to said flame holder to thereby retain said flame holder on the torch body.

7. A flame holder system as in claim 6 wherein said at least two catch pins comprises two catch pins that are diametrically opposed to one another on the torch body.

\* \* \* \* \*